

**FUCHS Industrial Lubricants**

**For extra process reliability**



**Lubricants for the manufacture  
of tubes and sections**



FUCHS EUROPE SCHMIERSTOFFE GMBH

# YOUR STRONG GLOBAL PARTNER



## HOW WE EXCEL


We are a German company whose almost 600 employees manufacture and market a wide range of lubricants and derived specialties. The company, which was founded in 1931 as RUDOLF FUCHS, is located in Mannheim and is a 100 % subsidiary of FUCHS PETROLUB AG, which is the largest independent lubricants manufacturer worldwide.

Our company's degree of specialisation and innovation is way above the industrial average in this field. The full product line includes almost 2,000 lubricants and derived specialties for all walks of life, industrial processes and applications. Our customer's success is also our success. Because partnership to us means passing-on benefits.

The advantage of a strong market presence: FUCHS is the largest independent manufacturer of lubricants in the world. The benefit of premium, innovative products from a full-line manufacturer: With a complete product line as well as tailor-made special solutions, FUCHS has a product for every application. The benefits of reliability: Certified according to DIN EN ISO 9001:2000 and ISO/TS 16949:2002, FUCHS has been continuously upgrading its highly specialised lubricants for decades.

And naturally, partnership for us also means providing our customers with competent support. With comprehensive marketing. With high-performance logistics. With the development of successful service concepts. And qualified consulting. Because together, we can achieve more.

# FOR INDUSTRIAL LUBRICANTS

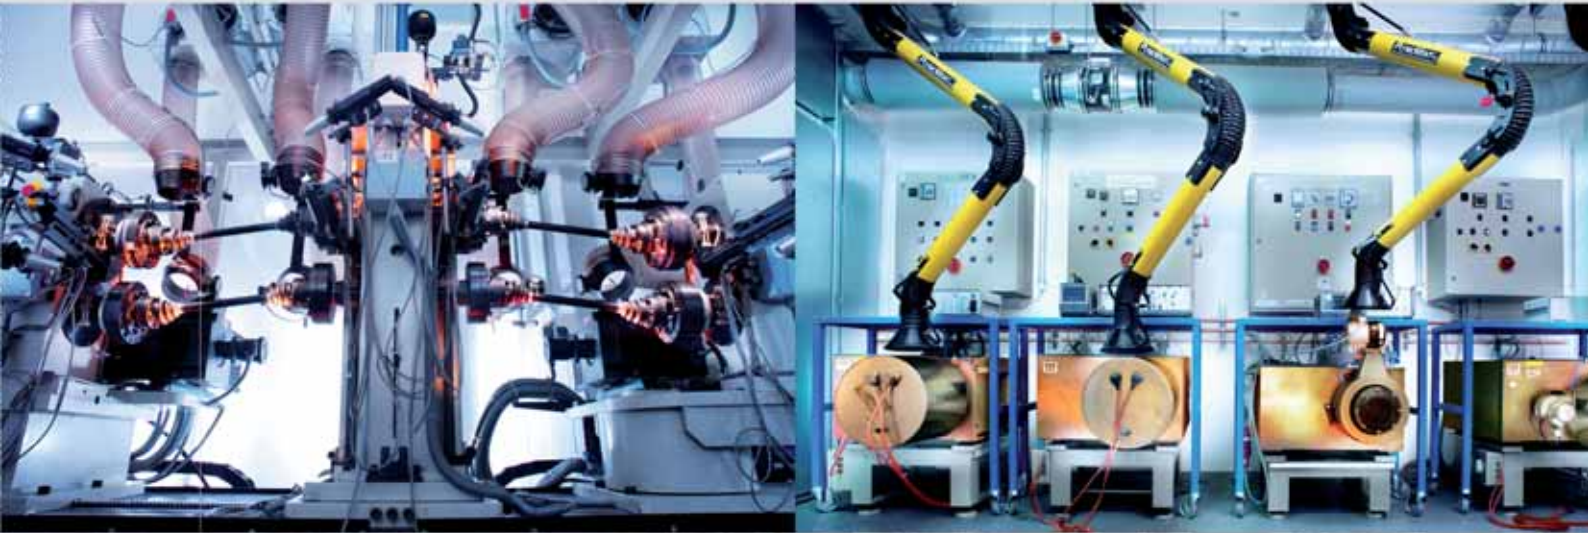

## WHAT INCREASES THE VALUE OF OUR PRODUCTS

We develop lubricants: application-specific and tailor-made for our customer's processes. Together we look for the best lubricants for our customers. This cooperation is unique in terms of its form, scope and intensity. We call it **development partnership**. The success of our development partnerships is based on an important fact: FUCHS is not one of the oil-giants.

FUCHS is a multinational, independent lubricant manufacturer. Our independence is the difference. We are open to new solutions, open for visions – the prerequisites for innovations. And innovation is the defining characteristic of FUCHS. 70 % of our products are less than five years old and the great majority of our products are individual solutions. Challenge us and see!



DIN EN ISO 9001:2000  
ISO/TS 16949:2002  
DIN EN ISO 14001:2004  
REG.NR. 2476



# Lubricants for the manufacture of tubes and sections.

## Cleaning



Surfaces for subsequent manufacturing processes may have to be oil-free and clean. There are a number of different types of cleaners available.

### Water-rinsable cleaners

RENOCLEAN UWF	Water-rinsable cleaner. Free of aromatics. Contains VOC*.
RENOCLEAN KU	Odor-optimized, water-rinsable cleaner. Free of aromatics. Contains VOC*.
RENOCLEAN KLV	VOC*-free, universal solvent-based cleaner. Perfect for industrial, workshop and domestic applications.

### Water-based alkaline (sprayable cleaners)

RENOCLEAN VR 1021 SERIES	Medium-alkalinity. For use at temperatures between +35 °C and +60 °C.
--------------------------	---

### Water-based alkaline (submersion cleaners)

RENOCLEAN SPEZIAL 2000	Medium-alkalinity. Universal application such as components, floors, etc.
RENOCLEAN VR 1798/2	Medium-alkalinity. Universally suitable for steel and aluminium. Also for ultrasonic cleaners.

\* VOC = Volatile Organic Compounds.

## Welding




Welding heat must be evenly dissipated and lubricants must not leave deposits (annealing residue-free welding solutions) for a stable and fault-less welding seam.

### Synthetic, water-miscible

RENOCLEAN VR 2840	Synthetic tube welding emulsion.
-------------------	----------------------------------

While the information and figures given here are typical of current production and confirm to specification, minor variations may occur. Subject to amendment. Edition 07/2008

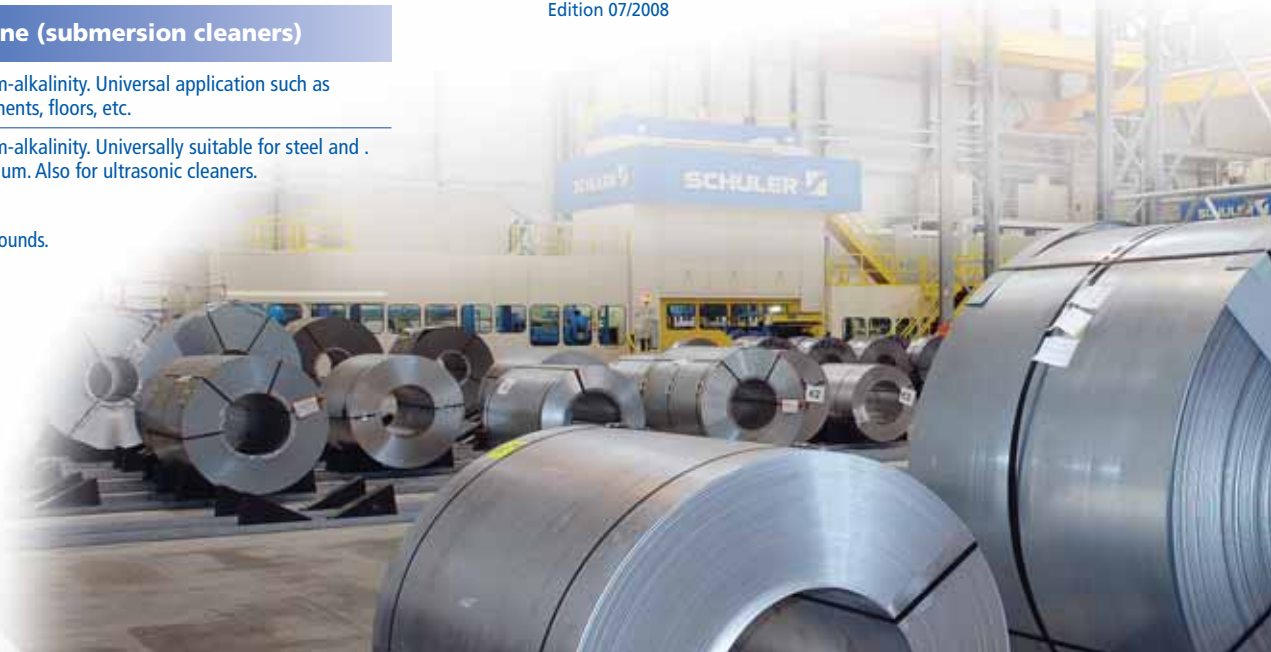

## Drawing



Apart from the even dissipation of heat, Stick-Slip behaviour makes particular demands of the lubricants.

### Water-miscible

#### RENOFORM MBW SERIES

Emulsifiable drawing oils for all materials.

### Non water-miscible

#### RENOFORM FW SERIES

Drawing oils with polar additives and good corrosion protection for all materials.

## Bending



Achieving the optimum wall-thickness, bend radiuses and folding characteristics pose problems for many users. The solution: Special bending media.

### Solvent-based

#### RENOFORM UBO SERIES

Annealing residue-free bending oils. Volatile at room temperature. Contain VOC\*.

#### RENOFORM LVO SERIES

Annealing residue-free bending oils. Volatile at room temperature. VOC\*-free.

### Water-miscible

#### RENOFORM MBW 2755

Mineral oil-based bending oil.

#### RENOFORM MBO 2755 SD

Synthetic forming lubricant. For use as a concentrate for bending operations.

### Non water-miscible

#### PLANTOFORM MBO 2907

Ester-based forming lubricant. Demulsifying. Medium-viscosity.

#### RENOFORM MBO 2907 SERIES

Ester-based forming lubricants. Demulsifying. High-viscosity.

\*VOC = Volatile Organic Compounds.



While the information and figures given here are typical of current production and confirm to specification, minor variations may occur. Subject to amendment.

Edition 07/2008

# The optimum lubricant for every stage in the process.

## Sawing



High-performance and well-proven cutting fluids are available for the sawing of tubes and sections. The following product lines are a perfect match to the cutting fluid concept:

### Cutting fluids

ECOCOOL	Water-miscible cutting fluids.
ECOCUT	Non water-miscible cutting fluids.

### Minimum quantity lubricants

PLANTO MIKRO	Ester-based Minimum Quantity Lubrication products.
ECOCUT MIKRO	Fatty alcohol-based Minimum Quantity Lubrication products.

## Corrosion protection



Corrosion protection products must be fully compatible with previously-applied lubricants. We recommend: ANTICORIT corrosion preventives.

### Dewatering fluids

ANTICORIT DF SERIES	High-speed dewatering fluids. Form thin, highly-effective, oily-, waxy- or lacquer-like corrosion protection films. Also available in versions without film-forming agents for pure, stainless drying.
---------------------	--

### Corrosion protection

ANTICORIT OHK SERIES	Corrosion protection concentrates and ready-to-use versions with white spirit, isoparaffins and oils to protect all metals. Outstanding fingerprint-remover properties.
----------------------	---

### Water-based

ANTICORIT MKR SERIES	Water-miscible corrosion preventives for the cleaning and interim protection of semi-finished components, phosphated parts and components used in the potable water sector. Also a hydraulic water and coolant additive.
ANTICORIT SKR SERIES	Water-miscible, mineral oil-free and low-foaming additives for cooling and hydraulic water.

### Vapour phase inhibitors

ANTICORIT VCI SERIES	Advanced VCI technology for the protection of all metals. Available as VCI paper, film, powder, tablets or oils. Tailor-made solutions for corrosion protection and packaging.
----------------------	--

A wide range of films are available ranging from oily to vaseline-like and wax-like. If a film is not required, we can solve your corrosion protection problems with our comprehensive VCI line of products. This includes paper, films, tablets, sponges and many other special solutions.

# The complete lubricants program from the specialists.

## All from one supplier

The manufacturing of tubes and sections involves a great many complex steps. These steps are interdependent on each other and carefully matched. And, in particular, the lubricants used have to guarantee optimum process compatibility. This leaflet provides an overview of the full line of products offered FUCHS.

Cross-compatibility is constantly monitored in our own, state-of-the-art research facilities and laboratories. This guarantees a reliable process chain starting with cleaning, to metalworking, through to corrosion protection.

As well as constant monitoring, we regularly add new products to our program.

Apart from conventional products and solutions, we also offer products which conform to national environmental legislation and/or VOC regulations.

Decades of experience, far-reaching know-how, global approvals from leading manufacturers and our local experts make our product program unique.

### **The benefits of FUCHS system products:**

- Intensive consultation, optimum service – worldwide
- Full range of products – all from one supplier
- Fully compatible products
- No process failures caused by product incompatibility
- Thorough testing in in-house facilities
- Close cooperation in obtaining approvals

For optimum process reliability.



## Ask the specialists:

### The FUCHS check list for a product recommendation.

Based on this questionnaire, we can tell you which is the best lubricant for your particular needs.

#### Your address

Company/customer: \_\_\_\_\_

Phone: \_\_\_\_\_

Street: \_\_\_\_\_

Fax: \_\_\_\_\_

City: \_\_\_\_\_

E-mail: \_\_\_\_\_

Contact/function/dept.: \_\_\_\_\_

#### Which product do you currently use?

Forming lubricant: \_\_\_\_\_

Cleaner: \_\_\_\_\_

Corrosion protection: \_\_\_\_\_

#### Forming

Material (blank):  Steel  Stainless steel  Aluminium  Nonferrous metal

Other: \_\_\_\_\_

Material thickness:  $s_0 =$  \_\_\_\_\_ mm

Tool: Material: \_\_\_\_\_ Coating: \_\_\_\_\_

Machine: Manufacturer: \_\_\_\_\_ Type: \_\_\_\_\_

#### Specification of the desired forming lubricant:

Mineral oil-based  Chlorine-free  Corrosion protection  
 Synthetic  Pigments

Viscosity at +40 °C:  $\nu_{40} =$  \_\_\_\_\_ mm<sup>2</sup>/s Concentration: \_\_\_\_\_ %

#### Application:

Spraying on the material  Run-off  
 Spraying the tool  Flooding

Other: \_\_\_\_\_



# Simply copy, complete – as far as possible – and fax back to +49 621 3701-414.

## Cleaning

**Process:**  Dipping  Spraying  Flooding  Other: \_\_\_\_\_  
**Type:**  Water-based  Acidic  Alkaline  Neutral  Other: \_\_\_\_\_  
**Washing:** Wash temperature: \_\_\_\_\_ °C pH-value: \_\_\_\_\_ Duration: \_\_\_\_\_ s, min, hr  
**Storage:** Type of storage: \_\_\_\_\_ Duration: \_\_\_\_\_ Days, Weeks  
**Subsequent processes:** \_\_\_\_\_

## Corrosion protection

### Application:

Description of the application

**Material:**  Steel  Electrogalvanize  Aluminium  \_\_\_\_\_  
 Ferric  Hot-galvanize  Gray cast iron  
**Surface of the parts:**  Dry  Wet  Chemical clean  Rough  Blank  
 Clean  Dirty  Sand blasted  Polished  \_\_\_\_\_  
**Packing:**  None  In  $\mu\text{m}$  PE film  Individual packaging  Closed packaging  
 In greaseproof paper  In  $\mu\text{m}$  VCI film  In racks  Open packaging  
 With VCI  On greaseproof paper  \_\_\_\_\_  
**Transport:**  No transport  National  Sea freight on deck  \_\_\_\_\_  
 Regional  Within Europe  Sea freight below deck  
**Storage conditions:**  Warehouse  Tropical climate  Cold climate  Temperature: \_\_\_\_\_  
 Shed  Subtropical climate  Monsoon conditions  Humidity: \_\_\_\_\_  
 Outdoors  Temperate climate  Coastal region  \_\_\_\_\_  
**Desired time of corrosion protection:**  Up to 1 week  Up to 3 month  Up to 1 year  Up to 3 year  
 Up to 1 month  Up to 6 month  Up to 1 1/2 year  Over 5 year  
**Coating:**  No coating  Waxy  < 2  $\mu\text{m}$   > 5  $\mu\text{m}$   
 Oily  Vaseline  2 – 5  $\mu\text{m}$   \_\_\_\_\_  
**Characteristics of the corrosion preventive:**  Non-thixotropic  VCI agent  Solvent A II  Aqueous  \_\_\_\_\_  
 Thixotropic  VOC freev  Solvent A II  Ba-free  
**Application:**  Dipping  Brushing  Hot application  Temperature: \_\_\_\_\_  
 Spraying  Wiping  Drying possible  \_\_\_\_\_  
**Process:** \_\_\_\_\_

Kind of process before corrosion protection

### Approvals:

Kind of process after corrosion protection

Needed approvals

### Current product:

Product: \_\_\_\_\_ Trading unit: \_\_\_\_\_  Sample available

### Problems:

Are there any problems with the actually used corrosion protection product?

Please enclose – if possible – a picture or a drawing of the part:

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

**FUCHS Industrial Lubricants**

## **Innovative lubricants need experienced application engineers**

Every lubricant change should be preceded by expert consultation on the application in question. Only then can the best lubricant system be selected. Experienced FUCHS engineers will be glad to advise on products for the application in question and also on our full range of lubricants.



Contact:



### **FUCHS EUROPE SCHMIERSTOFFE GMBH**

Friesenheimer Straße 15  
68169 Mannheim / Germany  
Phone: +49 621 3701-0  
Fax: +49 621 3701-570  
E-mail: [zentrale@fuchs-europe.de](mailto:zentrale@fuchs-europe.de)  
[www.fuchs-europe.de](http://www.fuchs-europe.de)

Export Division  
Friesenheimer Straße 9  
68169 Mannheim / Germany  
Phone: +49 621 3701-703  
Fax: +49 621 3701-719